




## THE ST. LOUIS

The St. Louis family of poles were originally designed for use in many districts of this famous city on the Big Muddy. Originally called "The Granitoid Poles", StressCrete has reproduced this family in exacting detail. The two design variations are available from 5' to 22' mounting heights.



## Specification Details

Description	Catalog Number	"A" Pole Height Above Grade	"D" Tip Dimension	"C" Stepped Section Height	"E" Flare	"B" Direct Burial Length & "F" Dia.	Pole Weight Direct Burial	Pole Weight Base Plate
St Louis 10'	KLC10	10' 0"	6 1/4"	11 3/8"	18"	5' 0" x 10"	1220 lbs	1075 lbs
St Louis 13'	KLC13	13' 0"	5 3/4"	11 3/8"	18"	5' 0" x 10"	1300 lbs	1155 lbs
St Louis 15'	KLC15	15' 0"	5 1/4"	11 3/8"	18"	5' 0" x 10"	1345 lbs	1200 lbs
St Louis 18'	KLH18	18' 0"	5 3/4"	13 3/4"	22"	5' 6" x 10"	1875 lbs	1715 lbs
St Louis 20'	KLH20	20' 0"	5 1/4"	13 3/4"	22"	5' 6" x 10"	1920 lbs	1760 lbs
St Louis 22'	KLH22	22' 0"	4 3/4"	13 3/4"	22"	5' 6" x 10"	1955 lbs	1795 lbs

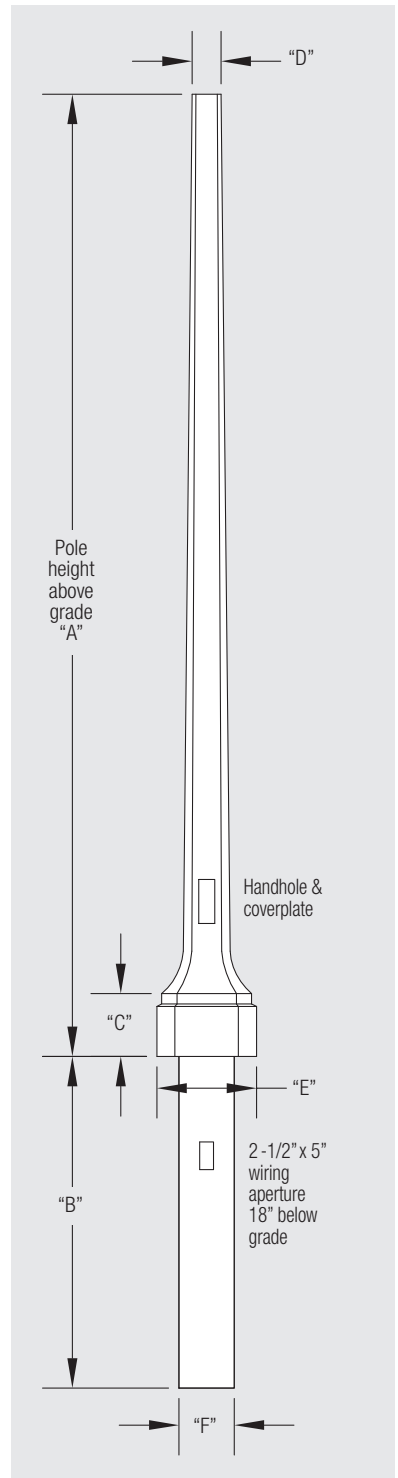

## How to Catalog for St. Louis Concrete Pole

Pole Style	Finish	Footing Details	Coating
KLC KLH	E – Etched Finish S – Polished Finish	DB – Direct Buried FBP – Flush Baseplate SBP – Stub Baseplate	NA – Non Acrylic A – Acrylic AG – Anti Graffiti Coating***
<b>KLH</b> <b>22'</b>	<b>E</b> <b>40</b>	<b>DB</b> <b>140 30/30</b>	<b>GFI</b> <b>NA</b>
<b>Height</b> 5' - 22'	<b>Color**</b> 10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze	<b>Tenon (Post Top Mount)</b> Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long	<b>Options*</b> DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest BPC – Base Plate Cover AB – Anchor Bolts BA – Banner Arms FH – Flag Holders


\* Consult website for full listings. \*\* See decor colors on page 2 for full selection of colors.  
\*\*\*Anti Graffiti Coating is extra, consult factory for more details.

## Footing Details


### Direct Buried

(Simple and Cost Effective)


1. Auger the setting hole.
2. Set pole in hole and plumb straight.
3. Backfill\* with required backfill tamping every 4" to 6".



### Baseplate Option 1: FBP



### Baseplate Option 2: SBP

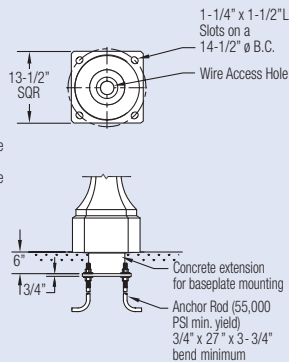

\*Generally the excavated material can be used for backfill, in some situations better backfill may be required.

