


THE MEMPHIS

The simple lines of the Memphis bridges the gap between the ornamental designs of the first three decades of the 20th century and the more utilitarian designs that had their origin in the stark realities of the 40's and 50's. It is available in heights from 5' to 32' in all of our concrete decor colors.

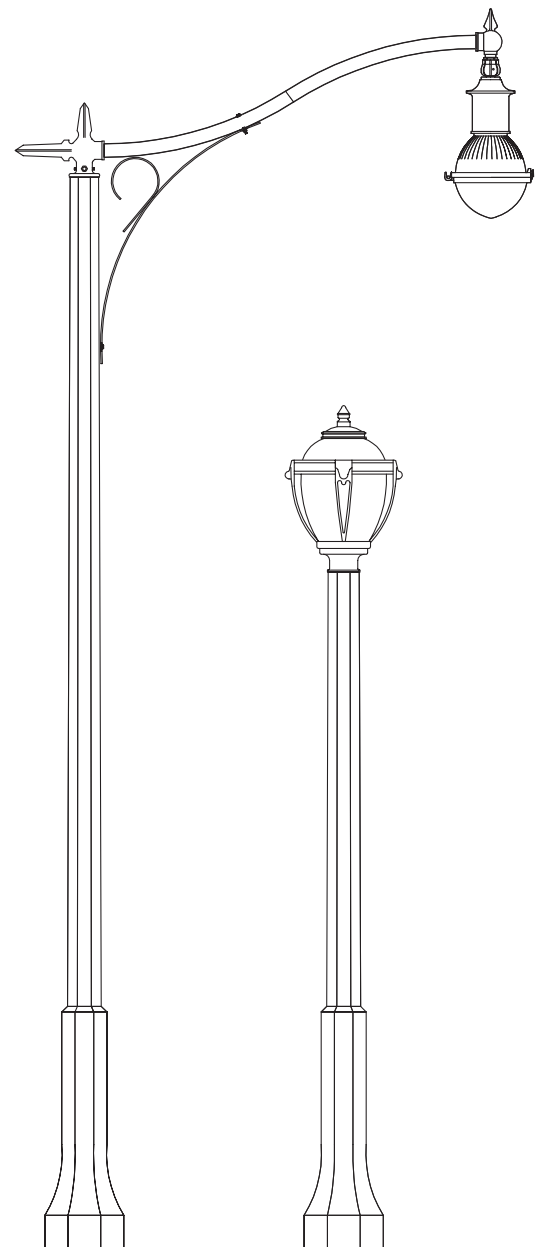

Specification Details

| Description | Catalog Number | "A" Pole Height Above Grade | "D" Tip Dimension | "C" Stepped Section Height | "E" Flare | "B" Direct Burial Length & "F" Dia. | Pole Weight Direct Burial | Pole Weight Base Plate | |
|-------------|----------------|-----------------------------|-------------------|----------------------------|-----------|-------------------------------------|---------------------------|------------------------|----------|
| Memphis | 10' | KM10 | 10' 0" | 5 1/2" | 43" | 14" | 4' 6" x 10" | 900 lbs | 700 lbs |
| | 13' | KM13 | 13' 6" | 5 1/4" | 43" | 14" | 4' 6" x 10" | 975 lbs | 775 lbs |
| | 16' | KM16 | 15' 10" | 5" | 43" | 14" | 4' 6" x 10" | 1050 lbs | 850 lbs |
| Highwayman | 18' | KMH18 | 18' 0" | 7 1/2" | 38 1/2" | 18" | 5' 0" x 12" | 1770 lbs | 1470 lbs |
| | 20' | KMH20 | 20' 0" | 7 5/16" | 38 1/2" | 18" | 5' 0" x 12" | 1860 lbs | 1560 lbs |
| | 25' | KMH25 | 25' 0" | 6 7/8" | 38 1/2" | 18" | 5' 0" x 12" | 2100 lbs | 1800 lbs |
| | 30' | KMH30 | 30' 0" | 6 1/2" | 38 1/2" | 18" | 5' 0" x 12" | 2340 lbs | 2040 lbs |
| | 32' | KMH325 | 32' 6" | 6 1/4" | 38 1/2" | 18" | 5' 6" x 12" | 2420 lbs | 2120 lbs |

How to Catalog for Memphis Concrete Pole

| Pole Style | Finish | Footing Details | Coating |
|------------------------------|---|--|---|
| KM KMH | E – Etched Finish S – Polished Finish | DB – Direct Buried FBP – Flush Baseplate SBP – Stub Baseplate | NA – Non Acrylic A – Acrylic AG – Anti Graffiti Coating*** |
| KMH | E | DB | GFI |
| 30' | 40 | 140 30/30 | NA |
| Height 5' - 32' 6" | Color** 10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze | Tenon (Post Top Mount) Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long | Options* DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest BPC – Base Plate Cover AB – Anchor Bolts BA – Banner Arms FH – Flag Holders |


* Consult website for full listings. ** See decor colors on page 2 for full selection of colors.
***Anti Graffiti Coating is extra, consult factory for more details.

Footing Details


Direct Buried

(Simple and Cost Effective)


1. Auger the setting hole.
2. Set pole in hole and plumb straight.
3. Backfill* with required backfill tamping every 4" to 6".




Baseplate Option 1: FBP

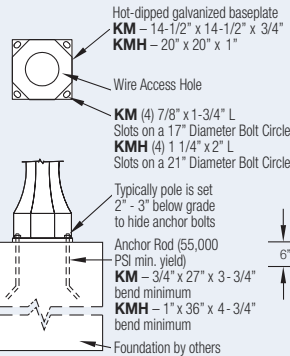

Baseplate Option 2: SBP

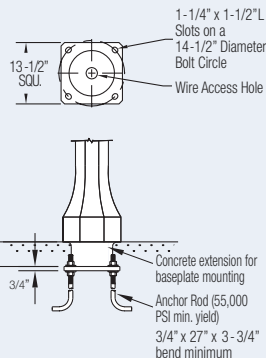

*Generally the excavated material can be used for backfill, in some situations better backfill may be required.

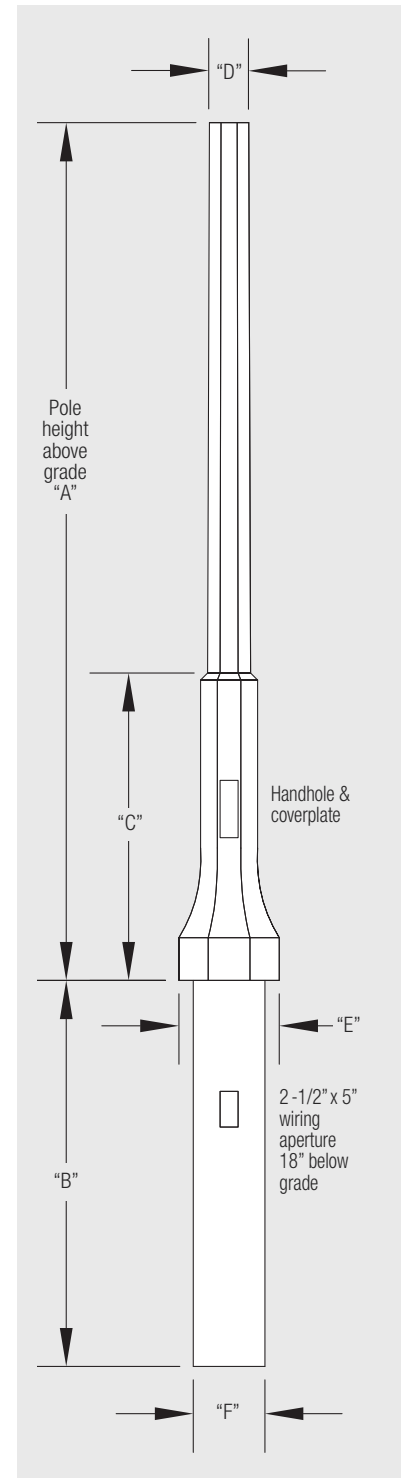

Typical Pole Cross Section