



# THE TRADITIONAL

## Family of Poles

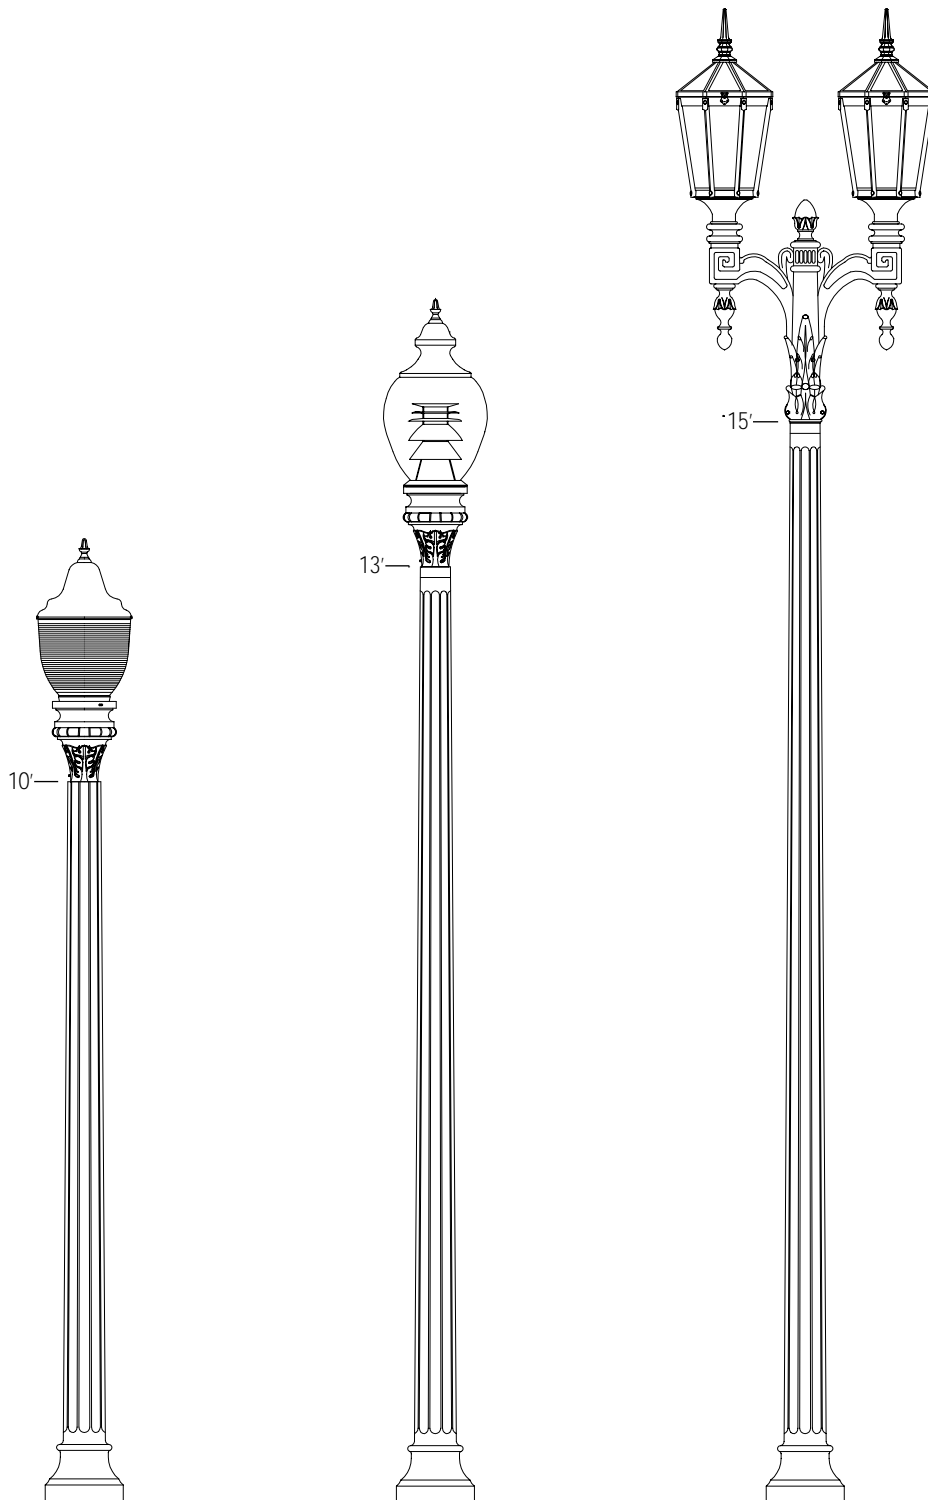

This simple 10 fluted pole was originally designed and installed in many residential areas in several west coast cities. Now in spun concrete it continues to offer understated elegance to any project it may be used for. It is currently available in heights from 10' to 15' as well as a lighted and nonlighted bollard.

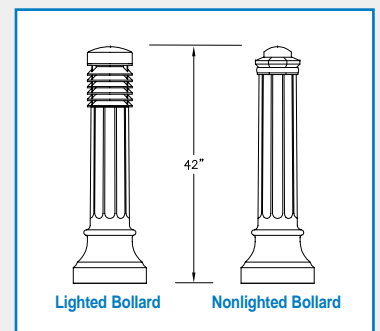

For more details please visit the bollard section in the King Luminaire Catalog or website [www.kingluminaire.com](http://www.kingluminaire.com)



King Luminaire • StressCrete • Est. 1953

**STRESSCRETE  
GROUP**

## How to Catalog\*

Description	Catalog Number	"A" Pole Height Above Grade	"C" Tip Dimension	"B" Direct Burial Length & "D" Dia.	Pole Weight Direct Burial	Pole Weight Base Plate
Traditional 10'	KD10	10' 1"	5 1/2"	4' 6" x 8 1/4"	525 lbs	375 lbs
Traditional 13'	KD13	13' 1"	5"	4' 6" x 8 1/4"	615 lbs	465 lbs
Traditional 15'	KD15	15' 1"	5"	4' 6" x 8 1/4"	710 lbs	560 lbs



\* For bollard catalog information please see the bollard section in the King Luminaire catalog or visit our website at [www.kingluminaire.com](http://www.kingluminaire.com)

## Options

- **Color Selection:** Listed below are a few suggested color options. Other standard or custom colors are available in etched (sand blasted) finish only.

Etched Finish Description	Color Catalog Number	Color of Matrix
Desert Sand	E70	Buff
Eclipse	E11	Black
Aztec Jade	E51	Green
Saluki Bronze	E90	Brown

- **Base Plate Mounting:** Two options available (see details below). Specify "FBP" for Option 1 or "SBP" for Option 2 (e.g. KD15-FBP). Unless otherwise specified, pole will be supplied as direct buried. Anchor bolts are optional. Please specify "AB" if required.
- **Electrical Receptacle:** Specify "DR" for 2 outlet, "GFI" for Ground Fault 2 outlet or "SR" for 1 outlet.
- **Ladder Rest:** Specify "LRN"
- For Mounting Accessories see Arms & Capitals in King catalog or at [www.kingluminaire.com](http://www.kingluminaire.com).
- For Standard Arms and Post Top Mounting, see Pole Accessories in StressCrete catalog or at [www.stresscrete.com](http://www.stresscrete.com).

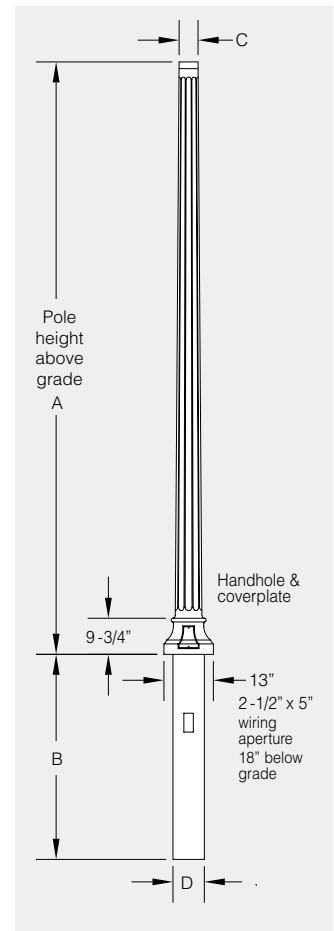

## Example of Typical Pole Specification

<b>KD15</b>	<b>E70</b>	<b>FBP</b>	<b>140 30/30</b>
Traditional 15'	Desert Sand Etched Finish	Baseplate Option 1	2 7/8" O.D. x 3" long Tenon Mount

Note: as FBP is indicated, pole will come with base plate. Anchor Bolts are optional. Please specify "AB" if required.


## Footing Details

### Direct Embedment




(Simple and Cost Effective)

1. Auger the setting hole.
2. Set pole in hole and plumb straight.
3. Backfill\* with required backfill tamping every 4" to 6".

### Baseplate Option 1: FBP



### Baseplate Option 2: SBP



\*Generally the excavated material can be used for backfill, in some situations better backfill may be required.



King Luminaire • StressCrete • Est. 1953

**STRESSCRETE GROUP**

9200 Energy Lane  
Northport, Alabama 35476-3442  
Telephone (205) 339-0711  
Toll Free 1-800-435-6563 Fax (205) 339-4840

1153 State Route 46N  
Jefferson, Ohio 44047  
Toll Free 1-800-268-7809 Fax (905) 632-8116

14503 Wallick Road  
Atchison, Kansas 66002  
Telephone (913) 255-3112  
Toll Free 1-800-837-1024 Fax (913) 255-3124

840 Walkers Line, P.O. Box 7  
Burlington, Ontario L7R 3X9  
Telephone (905) 632-9301  
Toll Free 1-800-268-7809 Fax (905) 632-8116